


Radon-Ready House/Passive Mitigation Crawlspace Detail

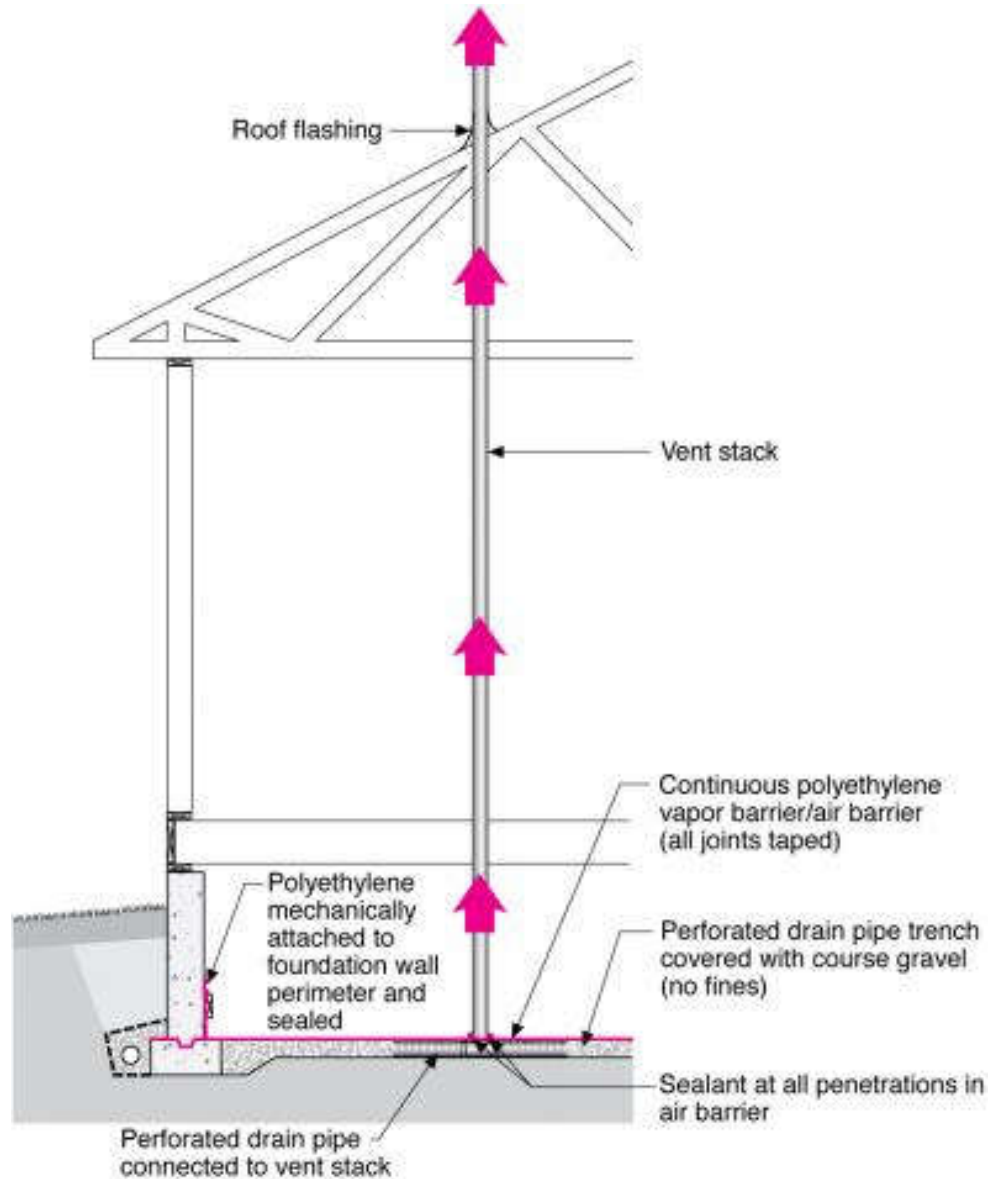

9.3. Install a 3-4 inch diameter PVC pipe T-fitting from below the crawl space liner or slab. Connect it to a pipe that runs vertically through the house and exhausts to the exterior a minimum of 12 inches above the roof and 10 feet from openings into conditioned spaces. Install a power supply accessible to the upper top 50% of the pipe in case there is a need to convert to an active radon system.